




薄型双气缸结构，不回转精度高及
2倍输出力，抵抗侧面负载力强。

■ 型号表示方法



■ 标准规格

缸径(mm)	6	10	15	20	25	32
流体	空气					
动作方式	双作用					
最高使用压力 MPa	0.7					
最低使用压力 MPa	0.15	0.1			0.05	
环境和流体温度	-10~+60℃(但未冻结)					
缓冲	两端橡胶缓冲					
使用活塞速度 mm/s	30~300	30~800	30~700	30~600		
结构	双气缸(2倍输出力)					
*润滑	不需要					
行程调整范围	缩回行程0~5mm					
轴承	滑动轴承/球轴承					
活塞杆不回转	滑动轴承	±0.1°				
精度	球轴承	±0.1°				
接管口径Rc	M5×0.8				1/8	

* 如需要润滑，请用透平1号油ISOVG32。


■ 标准行程表

缸径(mm)	标准行程	行程制作可能范围
6	10,20,30,40,50	60~100
10	10,15,20,25,30,35,40,45,50,60,70,75	80~150
15		110~150
20	10,15,20,25,30,35,40,45,50,60,70,75,80,90,100	110~200
25		
32		

磁性开关规格及特性可参阅磁性开关系列。
导线长度表示记号：无记号-0.5m, L-3m, Z-5m
例：Z73, Z73L

■ 外形尺寸图(毫米)

CXS□6

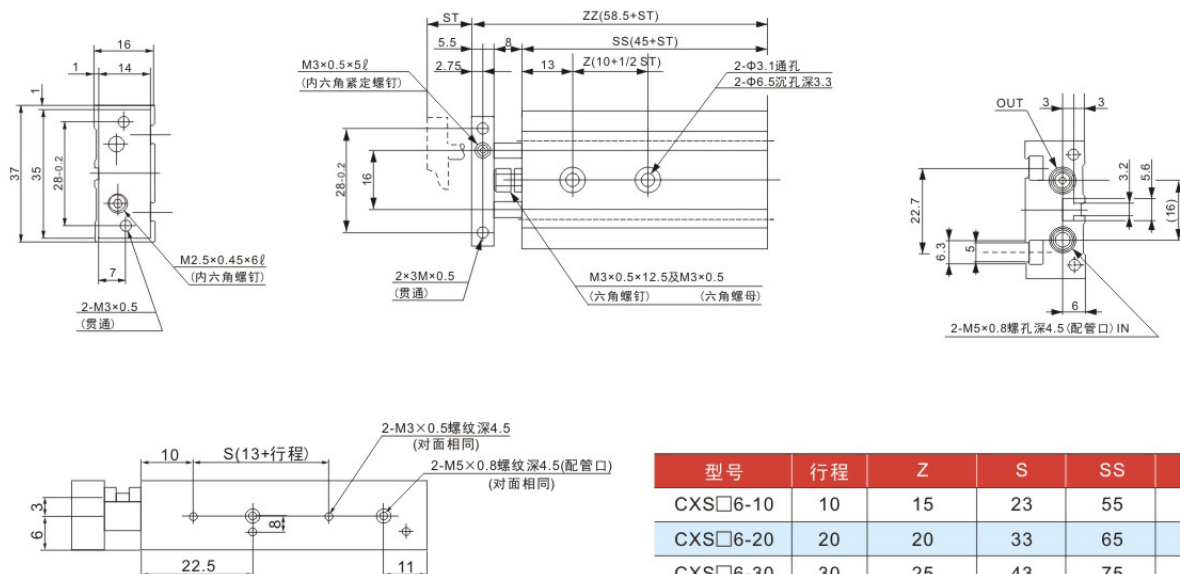

型号	行程	Z	S	SS	ZZ
CXS□6-10	10	15	23	55	68.5
CXS□6-20	20	20	33	65	78.5
CXS□6-30	30	25	43	75	88.5
CXS□6-40	40	30	53	85	98.5
CXS□6-50	50	35	63	95	108.5

CXSW
双缸气缸

CQMB
薄型气缸

CK1
夹紧气缸


RSQ
止动气缸

RSH/1H
止动气缸


CXS
双杆气缸




CXS□10·15·20·25·32

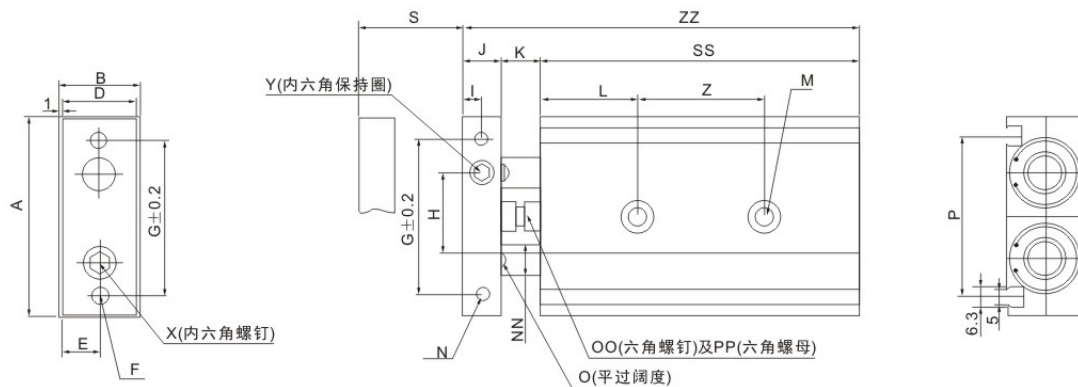

Φ10-15

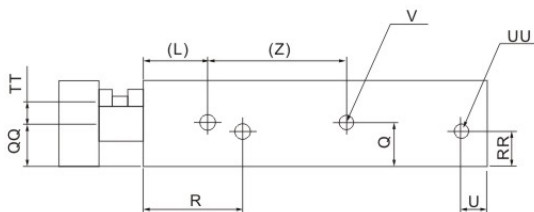

Φ20, Φ25, Φ32

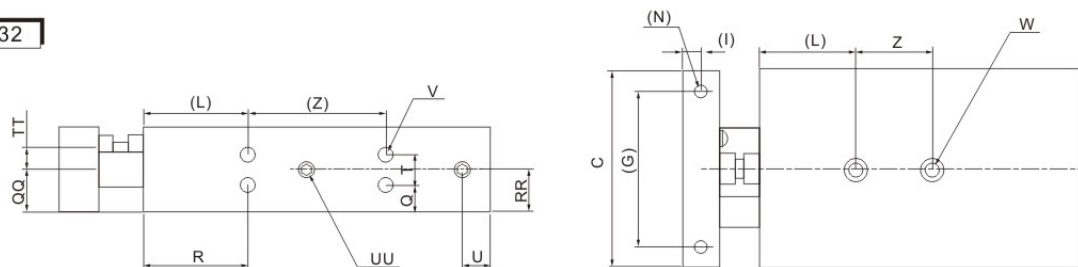

型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	NN	O	OO	P	PP	Q	QQ	R	RR	S	SS	T	TT	U	UU	V	W	X	Y	Z	ZZ																															
CXS○10-10	46	17	44	15	7.5	2-M4 ×0.7 (通孔)	35	20	4	8	9	20	2-Φ3.4 通孔 2-Φ6.5 沉孔深度 3.3	2-M3 ×0.5 螺纹 深度 5	Φ6	5	M4 × 0.7 × 14.5 ℓ	33.6	M4 × 0.7	8.5	7	30	7	10	65	-	5	8	4-M5 ×0.8 螺纹深度 4.5 (接气口 (相对面 相同))	4-M3 ×0.5 螺纹深度 4.5 (相对面 相同))	2-M4 ×0.7 螺纹深 度 7	M3 × 0.5 × 10 ℓ	M3 × 0.5 × 5 ℓ	30	82																															
CXS○10-20																								20	75									40	92																															
CXS○10-30																								30	85									40	95	102																														
CXS○10-40																								40	95									50	105	112																														
CXS○10-50																								50	105									60	115	122																														
CXS○15-10	58	20	56	18	9	2-M5 ×0.8 (通孔)	45	25	5	10	9	30	2-Φ4.3 通孔 2-Φ8 沉孔深度 4.4	2-M4 ×0.7 螺纹 深度 6	Φ8	6	M4 × 0.7 × 14.5 ℓ	48	M4 × 0.7	10	10	38.5	10	10	70	-	5	8	4-M5 ×0.8 螺纹深度 4.5 (接气口 (相对面 相同))	4-M4 ×0.7 螺纹深度 5 (相对面 相同))	2-M5 ×0.8 螺纹深 度 8	M4 × 0.8 × 10 ℓ	M5 × 0.7 × 4 ℓ	25	89																															
CXS○15-20																								20	80									30	90	99																														
CXS○15-30																								30	90									40	100	109																														
CXS○15-40																								40	100									50	110	119																														
CXS○15-50																								50	110									60	120	129																														
CXS○20-10	64	25	62	23	11.5	2-M5 ×0.8 (通孔)	50	28	6	12	12	30	2-Φ5.5 通孔 2-Φ9.5 沉孔深度 5.3	2-M4 ×0.7 螺纹 深度 6	Φ10	8	M6 × 1.0 × 18.5 ℓ	53	M6 × 1.0	7.75	12.5	45	7.75	10	80	9.5	6.5	8	4-M5 ×0.8 螺纹深度 4.5 (接气口 (相对面 相同))	8-M4 ×0.7 螺纹深度 6 (相对面 相同))	2-M6 ×1.0 螺纹深 度 10	M6 × 1.0 × 12 ℓ	M5 × 0.8 × 5 ℓ	30	104																															
CXS○20-20																								20	90									30	100	114																														
CXS○20-30																								30	100									40	110	124																														
CXS○20-40																								40	110									50	120	134																														
CXS○20-50																								50	120									60	130	144																														
CXS○20-75																								75	145									85	155	169																														
CXS○20-100																								100	170									110	180	194																														
CXS○25-10																								80	30									78	28	14	2-M6 ×1.0 (通孔)	60	35	6	12	12	30	2-Φ6.9 通孔 2-Φ11 沉孔深度 6.3	2-M5 ×0.8 螺纹 深度 7.5	Φ12	10	M6 × 1.0 × 18.5 ℓ	64	M6 × 1.0	8.5	15	46	15	10	82	13	9	9	4-1/8 ×0.8 螺纹深度 6.5 (接气口 (相对面 相同))	8-M5 ×0.8 螺纹深度 7.5 (相对面 相同))	2-M8 ×1.25 螺纹深 度 12	M6 × 1.0 × 14 ℓ	M6 × 1.0 × 5 ℓ	30	106
CXS○25-20																																																							20	92									30	102
CXS○25-30	30	102	40	112	126																																																													
CXS○25-40	40	112	50	122	136																																																													
CXS○25-50	50	122	60	132	146																																																													
CXS○25-75	75	147	85	157	171																																																													
CXS○25-100	100	172	110	182	196																																																													
CXS○32-10	98	38	96	36	18	2-M6 ×1.0 (通孔)	75	44	8	16	14	30	2-Φ6.9 通孔 2-Φ11 沉孔深度 6.3	2-M5 ×0.8 螺纹 深度 8	Φ16	13	M8 × 12.5 × 23 ℓ	76	M8 × 1.25	9	19	56	19			10	92	20	11.5	10	4-1/8 ×0.8 螺纹深度 6.5 (接气口 (相对面 相同))	8-M5 ×0.8 螺纹深度 7.5 (相对面 相同))	2-M8 ×1.25 螺纹深 度 12																						M8 × 1.25 × 16 ℓ	M8 × 1.25 × 8 ℓ									40	122
CXS○32-20																										20	102																																						30	112
CXS○32-30																								30	112	40	122							142																																
CXS○32-40																								40	122	50	132							152																																
CXS○32-50																								50	132	60	142							162																																
CXS○32-75																								75	157	85	167							187																																
CXS○32-100																								100	182	110	192							212																																