




■ 符号



■ 产品特性

- 1、手指行程长，适合夹持体积大的物件；
- 2、双活塞驱动，能增大保持力；
- 3、采用齿轮齿条操作，令手指能同步开关，重复精度高；
- 4、所有系列均附磁石，便于控制。

■ 标准规格

内径(mm)	10		16		20		25		32	
动作型式	复动型									
工作介质	空气(经40 μm以上滤网过滤)									
使用压力范围	0.25~0.7MPa(36~100psi)				0.15~0.7MPa(22~100psi)					
保证耐压力	1.2MPa(175psi)									
工作温度	-20~70℃									
给油	气缸部分：无需给油									
缓冲型式	防撞垫									
重复精度	±0.1mm									
夹持力(注1)	14		45		74		131		228	
最高使用频率	40次/分钟								20次/分钟	
接管口径	M5×0.8								PT1/8	


注：在0.5MPa压力下及夹持点距离40mm(Φ10~Φ25)或80mm(Φ32)。

■ 行程

内径(mm)	标准行程(mm)	最大行程
10	20 30 40 60	60
16	30 40 60 80	80
20	40 60 80 100	100
25	40 60 80 100	100
32	60 80 100 150	150


注：其它特殊行程请于本公司联系。

■ 型号表示方法

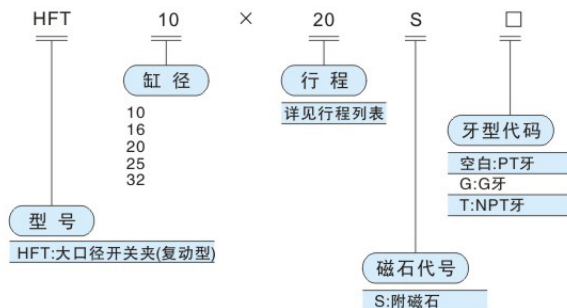


■ 外形尺寸图(毫米)



HFT10

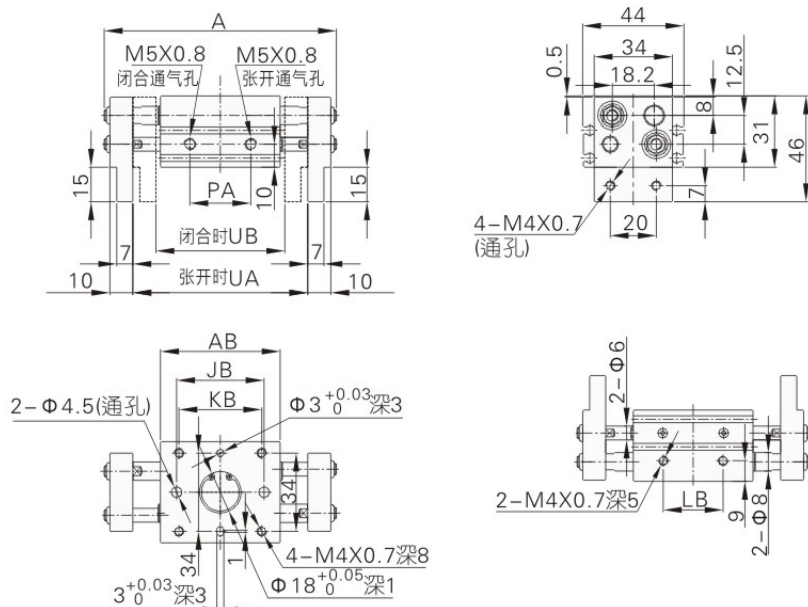




符号/行程	20	30	40	60
A	101	121	141	181
AB	52	60	68	86
JB	38	46	54	72
KB	36	44	52	70
LB	26	34	42	60
PA	23	30	35	45
UA(张开)	76	96	116	156
UB(闭合)	56	66	76	96

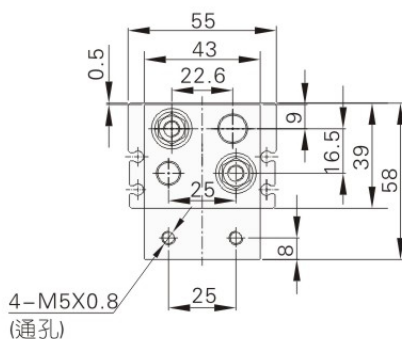[illegible]

符号/行程	30	40	60	80
A	128	148	194	234
AB	60	70	90	110
JB	40	50	70	90
KB	45	55	75	95
LB	28	38	58	78
PA	29	34	44	54
UA(张开)	98	118	164	204
UB(闭合)	68	78	104	124

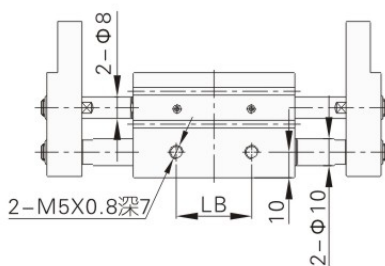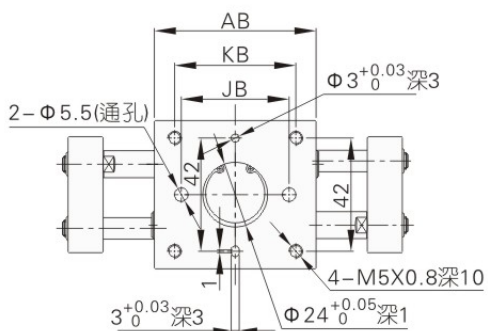





Technical drawing of the front view of a 3-position pneumatic cylinder. The drawing shows a central cylinder body with two end caps. Two M5x0.8 screws are shown on each end cap, labeled "M5X0.8 闭合同气孔" (closed position air hole) and "M5X0.8 张开通气孔" (open position air hole). Dimensions include a total width of 17, a central section width of 12.5, and a distance of 24 from the end cap to the central section. The distance between the two air holes is labeled "PA". The distance from the central section to the end cap is labeled "UB" (closed) and "UA" (open). The total distance between the two air holes is labeled "A".

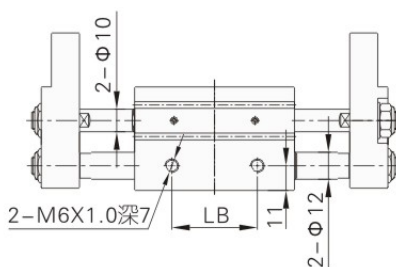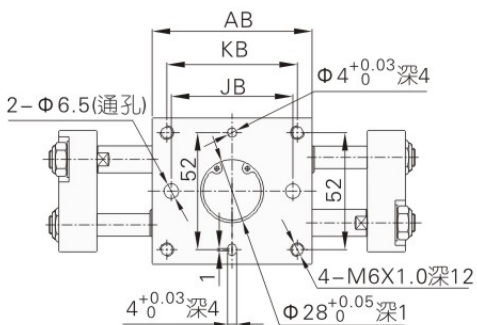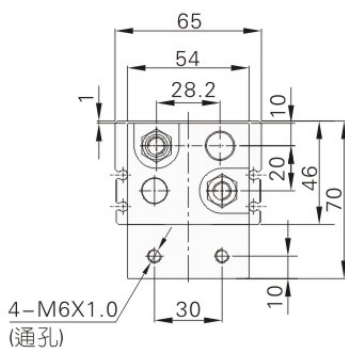

符号/行程	40	60	80	100
A	163	203	255	295
AB	71	91	113	133
JB	54	74	96	116
KB	58	78	100	120
LB	38	58	80	100
PA	36	46	56	66
UA(张开)	120	160	212	252
UB(闭合)	80	100	132	152







HFT25

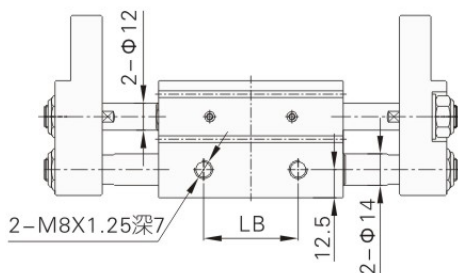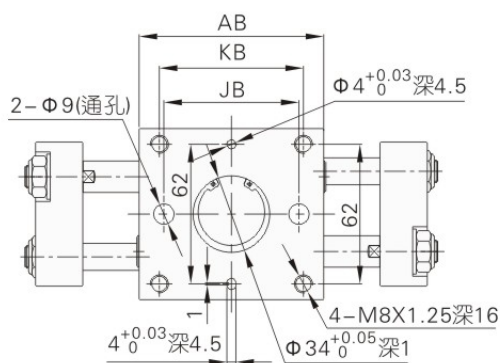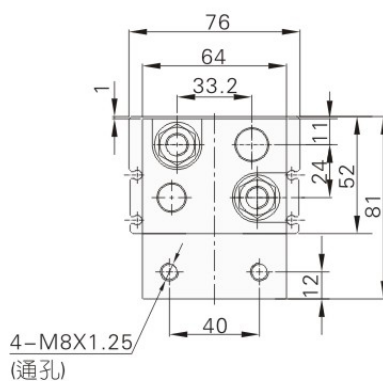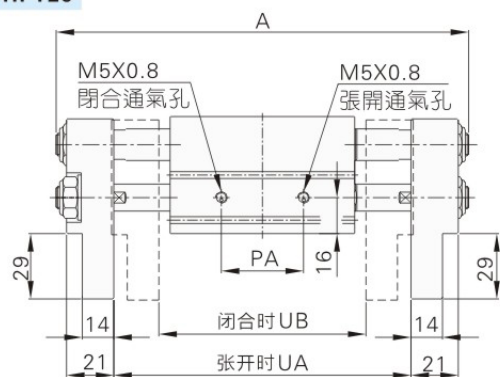

符号/行程	40	60	80	100
A	183	223	277	317
AB	82	102	122	142
JB	56	66	100	120
KB	60	70	104	124
LB	38	48	82	102
PA	36.5	46.5	56.5	66.5
UA(张开)	132	172	226	266
UB(闭合)	92	112	146	166

HFT32

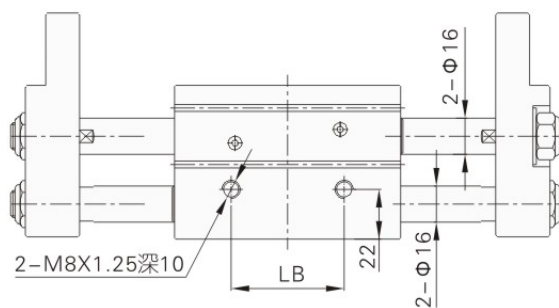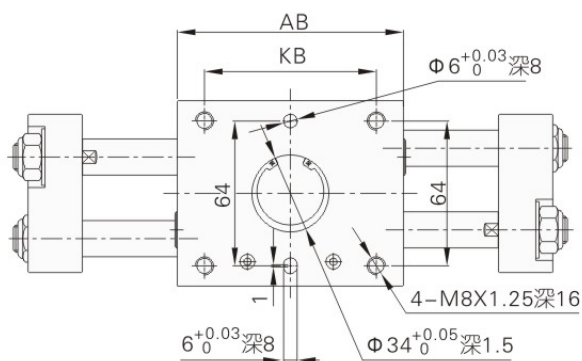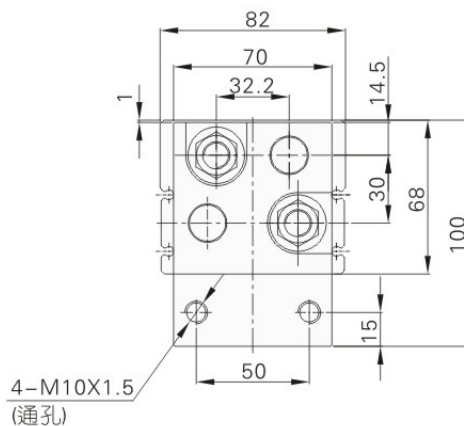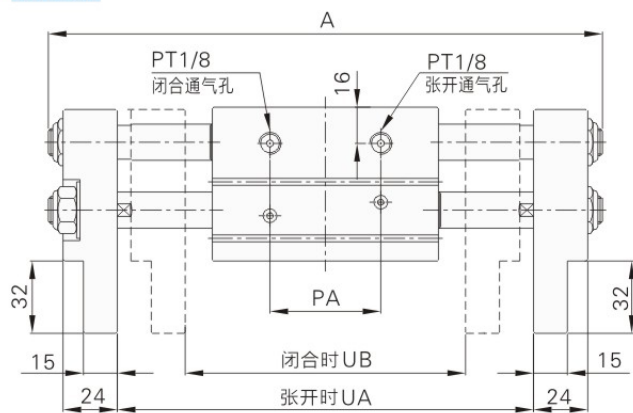

行程/符号	A	AB	KB	LB	PA	UA(张开)	UB(闭合)
60	245	100	76	50	48	184	124
80	285	120	86	60	58	224	144
100	343	158	134	108	68	282	182
150	443	208	184	158	93	382	232

HFT

开口夹

HFY

气动手指

ACK

转角气缸

QDK

夹紧气缸

MCK

夹紧气缸

NPM

打刀气缸