



■ 标准规格



缸径(mm)		12	16	20	25	32	40	50	63	80	100
动作方式		双作用型									
使用流体		压缩空气									
最高使用压力(MPa)		1.0									
最低使用压力(MPa)		0.1							0.05		
耐压力(MPa)		1.6									
环境和流体温度℃		-10~+60(但未冻结)									
配管口径		M5			Rc1/8		Rc1/4		Rc3/8		
行程允许误差mm	带橡胶缓冲	+2.0 0									
	不带缓冲	+1.0 0									
活塞速度 mm/s		50~500							50~300		
缓冲		可选择有无橡胶缓冲									
*给油		无需（给油时请使用透平油1种ISO VG32									
允许吸收能力 J	带橡胶缓冲	0.03	0.05	0.10	0.16	0.16	0.44	0.75	0.78	2.51	3.92
	不带缓冲	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56

■ 型号表示方法

不带开关(内置开关用磁环):SSD2

带开关(内置开关用磁环):SSD2-L

机种型号

SSD2 双作用·单活塞杆型
SSD2-L 双作用·单活塞杆型·带开关

缸径

12	Φ12	40	Φ40
16	Φ16	50	Φ50
20	Φ20	63	Φ63
25	Φ25	80	Φ80
32	Φ32	100	Φ100

配管螺纹种类

无符号	Rc螺纹
NN	NPT螺纹(Φ32以上)(接单生产)
GN	G螺纹(Φ32以上)(接单生产)

开关型号

直线 导线	L形 导线	触点	电压 AC/DC	显示	导线	缸径									
F2S※			●	单色显示式	2线			●	●						
F3S※			●		3线			●	●						
F2H※ F2V※			●		2线			●	●						
F3H※ F3V※			●	双色显示式	3线			●	●						
F3PH※ F3PV※			●		3线			●	●						
F2YH※ F2YV※			●		2线			●	●						
F3YH※ F3YV※			●	单色显示式	3线			●	●						
T0H※ T0V※			●		2线	●	●	●	●	●	●	●	●	●	●
T5H※ T5V※			●		2线	●	●	●	●	●	●	●	●	●	●
T8H※ T8V※			●	单色显示式	2线			●	●	●	●	●	●	●	●
T1H※ T1V※			●		2线			●	●	●	●	●	●	●	●
T2H※ T2V※			●		2线	●	●	●	●	●	●	●	●	●	●
T3H※ T3V※			●	单色显示式	3线			●	●	●	●	●	●	●	●
T3PH※ T3PV※			●		3线	●	●	●	●	●	●	●	●	●	●
T2WH※ T2WV※			●		2线	●	●	●	●	●	●	●	●	●	●
T2YH※ T2YV※			●	双色显示式	2线			●	●	●	●	●	●	●	●
T3WH※ T3WV※			●		3线	●	●	●	●	●	●	●	●	●	●
T3YH※ T3YV※			●		2线			●	●	●	●	●	●	●	●
T2YD※ T2YD※			●	双色显示式	2线			●	●	●	●	●	●	●	●
T2YDT※ T2YDT※			●		2线			●	●	●	●	●	●	●	●
T2JH※ T2JV※			●		2线			●	●	●	●	●	●	●	●

※导线长度

无符号	1m(标准)
3	3m(选择项)
5	5m(选择项)

开关数

R	前端带1个
H	后端带1个
D	带2个

安装部件

无符号	不带安装部件
LB	轴向脚座
CB	双耳环(带销和挡圈)
FA	前端法兰型
FB	后端法兰型

附件

I	单耳环连接件
Y	双耳环连接件(带销和挡圈)

选择项




	缸径	12	16	20	25	32	40	50	63	80	100
无符号	杆端内螺纹	●	●	●	●	●	●	●	●	●	●
N	杆端外螺纹	●	●	●	●	●	●	●	●	●	●
P6	防紫色化规格									●	●
M	活塞杆材质(不锈钢)	●	●	●	●	●	●	●	●	●	●
S	中间行程专用缸体	●	●	●	●	●	●	●	●	●	●
P4	二次电池	●	●	●	●	●	●	●	●	●	●
P40	应对规格	●	●	●	●	●	●	●	●	●	●





■ 外形尺寸图

SSD2-L-12~25(带开关·TOH/V、T5H/V、T2H/V、T3H/V)

杆端外螺纹部分

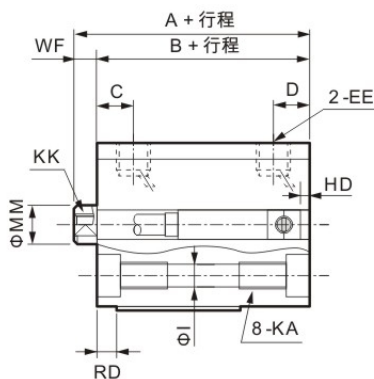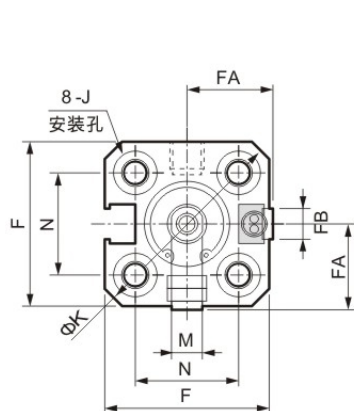

Φ20-Φ25

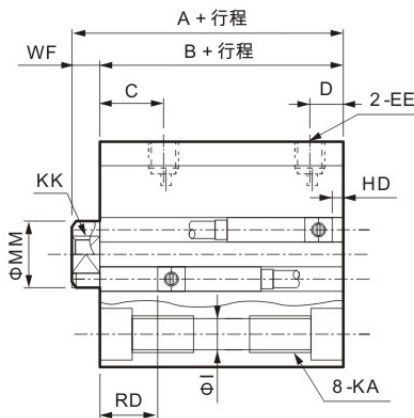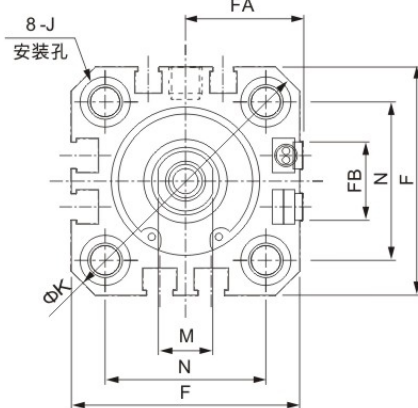

Φ(mm)	A	B	C	D	EE	F	FA	FB	I	J	K	KA	KK	M	MM	N	WF
12	25.5	22	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 螺孔深度3.5	32	M4深度7	M3深度6	5	6	15.5	3.5
16	25.5	22	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 螺孔深度3.5	38	M4深度7	M4深度8	6	8	20	3.5
20	34	29.5	8	5.5	M5	36	18.5(22)	12.5	5.5	9 螺孔深度5.5	47	M6深度11	M5深度7	8	10	25.5	4.5
25	37.5	32.5	11	6	M5	40	20.5(24)	13.5	5.5	9 螺孔深度5.5	51	M6深度11	M6深度12	10	12	28	5


Φ(mm)	有触点T0H·TOV、 T5H·T5V		无触点T2H·T2V、 T3H·T3V		无触点T2WH·T2WV、 T3WH·T3WV		无触点F2H·F2V、F3H·F3V、 F2YH·F2YV、F3YH·F3YV		无触点F2S·F3S	
	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD
12	1.5(0)	1.5(3)	1.5(0)	1.5(3)	3.5(2)	3.5(5)	-	-	-	-
16	0	4	0	4	1	6	-	-	-	-
20	3	7.5	3	7.5	5	9.5	7.5	12	6.5	11
25	4	9.5	4	9.5	6	11.5	8.5	14	7.5	13

杆端外螺纹部分

Φ(mm)	a'	c'	H'	kk'	M	MM	T	wf
12	10.5	9	8	M5	5	6	3.2	3.5
16	12	10	10	M6	6	8	3.6	3.5
20	14	12	13	M8	8	10	5	4.5
25	17.5	15	17	M10×1.25	10	12	6	5




轴向脚座(LB)带开关
SSD2-L-12~25-LB

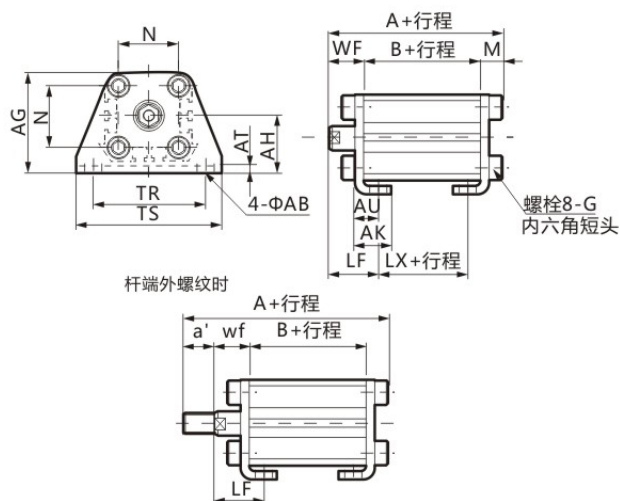

Φ(mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
Φ12	5	29.5	17	12.5	2	8	M4×10	15.5	34	44	4.8
Φ16	5	33.5	19	13	2	8	M4×10	20	38	48	4.8
Φ20	7	42	24	15	3.2	9.2	M6×16	25.5	48	62	7.2
Φ25	7	46	26	16.5	3.2	10.7	M6×16	28	52	66	7.2

Φ(mm)	WF	LF	A	B	LX	外螺紋時					
						a'	wf	LF	A	B	LX
Φ12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10
Φ16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10
Φ20	14.5	20.5	51.2	29.5	17.5	14	14.5	20.5	65.2	29.5	17.5
Φ25	15	22.5	54.7	32.5	17.5	17.5	15	22.5	72.2	32.5	17.5


前端法兰(FA)带开关
SSD2-L-12~25-FA

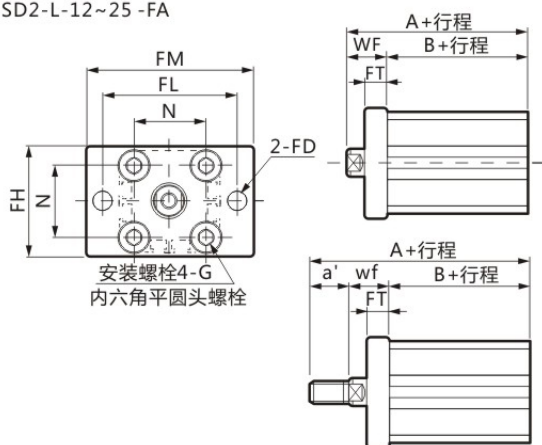

Φ(mm)	FD	FH	FL	FM	FT	N	G
Φ12	4.5	25	45	55	5.5	15.5	M4×12
Φ16	4.5	30	45	55	5.5	20	M4×12
Φ20	6.6	39	48	60	8	25.5	M6×16
Φ25	6.6	42	52	64	8	28	M6×16

Φ(mm)	WF	A	B	外螺纹时			
				a'	wf	A	B
Φ12	13.5	35.5	22	10.5	13.5	46	22
Φ16	13.5	35.5	22	12	13.5	47.5	22
Φ20	14.5	44	29.5	14	14.5	58	29.5
Φ25	15	47.5	32.5	17.5	15	65	32.5


双耳环(CB)带开关
SSD2-L-12~25-CB

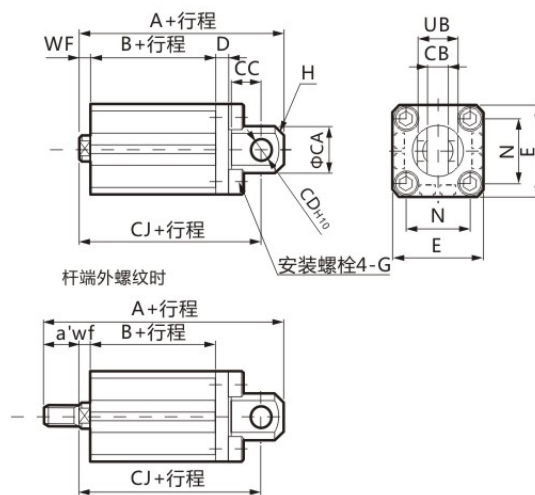

Φ(mm)	CA	CB	CC	CD	D	E	G	H	N
Φ12	12	5.2 ^{+0.2} ₀	7	5	4	25	M4×12	C1.5	15.5
Φ16	15	6.6 ^{+0.3} ₀	8	5	5	29	M4×12	C2	20
Φ20	20	8.2 ^{+0.2} ₀	12	8	5	36	M6×16	C4	25.5
Φ25	24	10.2 ^{+0.2} ₀	14	10	5	40	M6×16	C5	28

Φ(mm)	UB	WF	A	B	CJ	外螺纹时				
						a'	wf	A	B	CJ
Φ12	10 ^{-0.1} _{-0.3}	3.5	45.5	22	39.5	10.5	3.5	56	22	39.5
Φ16	12 ^{-0.1} _{-0.4}	3.5	46.5	22	40.5	12	3.5	58.5	22	40.5
Φ20	16 ^{-0.1} _{-0.3}	4.5	61	29.5	52	14	4.5	75	29.5	52
Φ25	20 ^{-0.1} _{-0.3}	5	67.5	32.5	57.5	17.5	5	85	32.5	57.5

后端法兰(FB)带开关
SSD2-L-12~25-FB

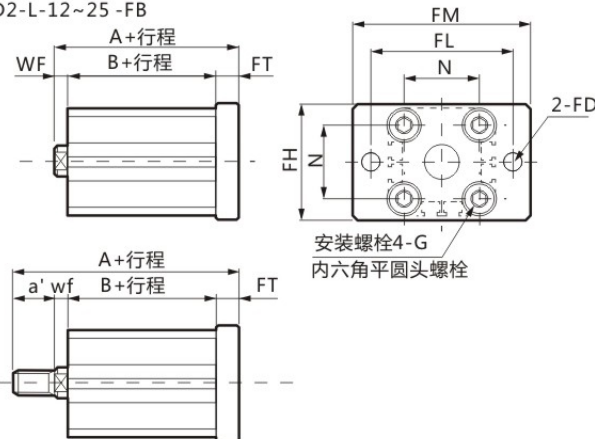

Φ(mm)	FD	FH	FL	FM	FT	N	G
Φ12	4.5	25	45	55	5.5	15.5	M4×12
Φ16	4.5	30	45	55	5.5	20	M4×12
Φ20	6.6	39	48	60	8	25.5	M6×16
Φ25	6.6	42	52	64	8	28	M6×16

Φ(mm)	WF	A	B	外螺纹时			
				a'	wf	A	B
Φ12	3.5	31	22	10.5	3.5	41.5	22
Φ16	3.5	31	22	12	3.5	43	22
Φ20	4.5	42	29.5	14	4.5	56	29.5
Φ25	5	45.5	32.5	17.5	5	63	32.5

SCA2
中型气缸




SSD2
紧凑型气缸



SSD2-12~25(不带开)



杆端外螺纹部分

Φ12-Φ16

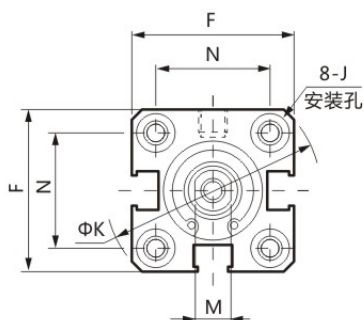

D

Φ20-Φ25

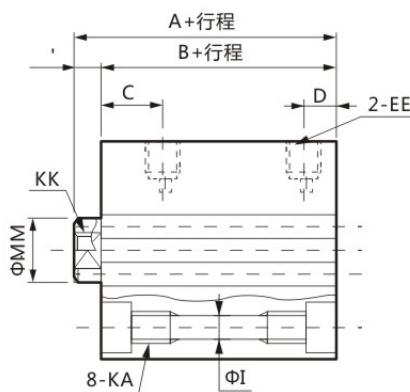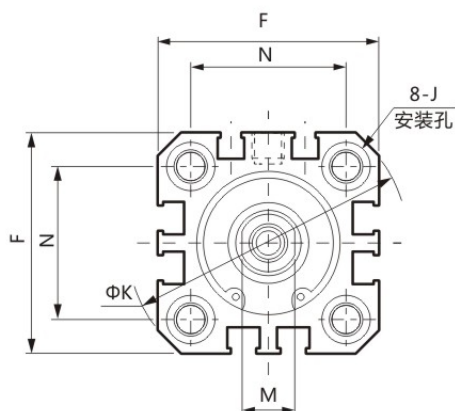


Φ(mm)	A	B	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
12	20.5	17	5.5	5.5	M5	25	3.5	6.5 镗孔深度3.5	32	M4深度7	M3深度6	5	6	15.5	3.5
16	20.5	17	5.5	5.5	M5	29	3.5	6.5 镗孔深度3.5	38	M4深度7	M4深度8	6	8	20	3.5
20	24	19.5	8	5.5	M5	36	5.5	9 镗孔深度5.5	47	M6深度11	M5深度7	8	10	25.5	4.5
25	27.5	22.5	11	6	M5	40	5.5	9 镗孔深度5.5	51	M6深度11	M6深度12	10	12	28	5

杆端外螺纹部分

Φ(mm)	a'	c'	H	kk'	M	MM	T	wf
12	10.5	9	8	M5	5	6	3.2	3.5
16	12	10	10	M6	6	8	3.6	3.5
20	14	12	13	M8	8	10	5	4.5
25	17.5	15	17	M10×1.25	10	12	6	5




轴向脚座(LB)不带开关
SSD2-12~25-LB

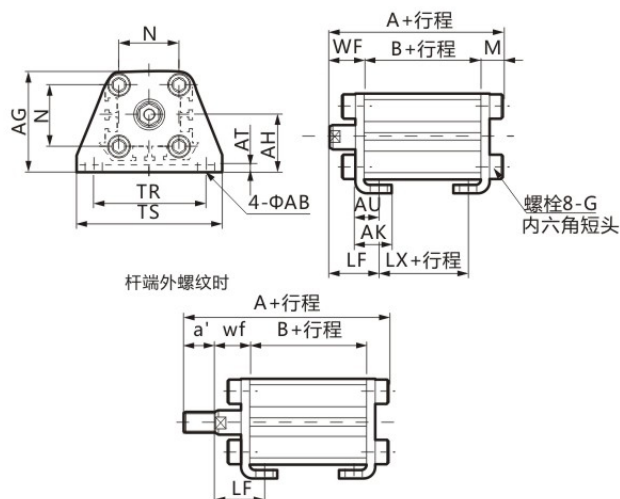

Φ(mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
Φ12	5	29.5	17	12.5	2	8	M4×10	15.5	34	44	4.8
Φ16	5	33.5	19	13	2	8	M4×10	20	38	48	4.8
Φ20	7	42	24	15	3.2	9.2	M6×16	25.5	48	62	7.2
Φ25	7	46	26	16.5	3.2	10.7	M6×16	28	52	66	7.2

Φ(mm)	WF	LF	A	B	LX	外螺纹时			
						a'	wf	A	B
Φ12	13.5	19.5	35.3	17	5	10.5	13.5	19.5	45.8
Φ16	13.5	19.5	35.3	17	5	12	13.5	19.5	47.3
Φ20	14.5	20.5	41.2	19.5	7.5	14	14.5	20.5	55.2
Φ25	15	22.5	44.7	22.5	7.5	17.5	15	22.5	62.2


前端法兰(FA)不带开关
SSD2-12~25-FA

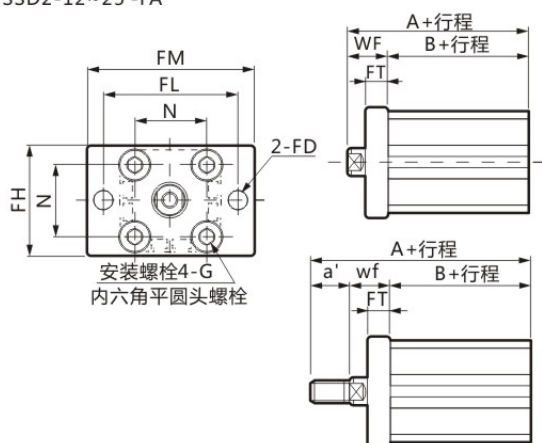

Φ(mm)	FD	FH	FL	FM	FT	N	G
Φ12	4.5	25	45	55	5.5	15.5	M4×12
Φ16	4.5	30	45	55	5.5	20	M4×12
Φ20	6.6	39	48	60	8	25.5	M6×16
Φ25	6.6	42	52	64	8	28	M6×16

Φ(mm)	WF	A	B	外螺纹时			
				a'	wf	A	B
Φ12	13.5	30.5	17	10.5	13.5	41	17
Φ16	13.5	30.5	17	12	13.5	42.5	17
Φ20	14.5	34	19.5	14	14.5	48	19.5
Φ25	15	37.5	22.5	17.5	15	55	22.5


双耳环(CB)不带开关
SSD2-12~25-CB

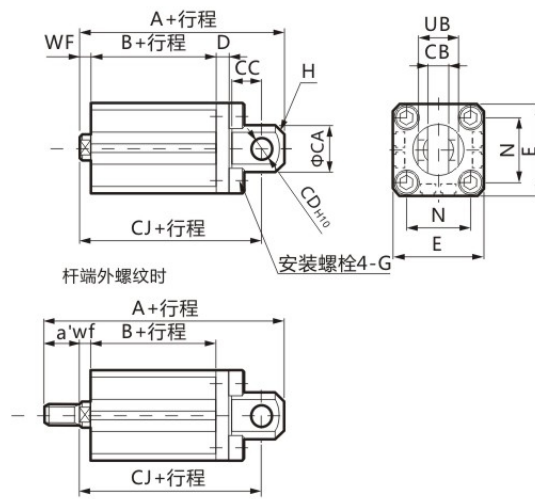

Φ(mm)	CA	CB	CC	CD	D	E	G	H	N
Φ12	12	5.2 ^{+0.2} ₀	7	5	4	25	M4×12	C1.5	15.5
Φ16	15	6.6 ^{+0.3} ₀	8	5	5	29	M4×12	C2	20
Φ20	20	8.2 ^{+0.2} ₀	12	8	5	36	M6×16	C4	25.5
Φ25	24	10.2 ^{+0.2} ₀	14	10	5	40	M6×16	C5	28

Φ(mm)	UB	WF	A	B	CJ	外螺纹时			
						a'	wf	A	B
Φ12	10 ^{-0.1} _{-0.3}	3.5	40.5	17	34.5	10.5	3.5	51	17
Φ16	12 ^{-0.1} _{-0.4}	3.5	41.5	17	35.5	12	3.5	53.5	17
Φ20	16 ^{-0.1} _{-0.3}	4.5	51	19.5	42	14	4.5	65	19.5
Φ25	20 ^{-0.1} _{-0.3}	5	57.5	22.5	47.5	17.5	5	75	22.5

后端法兰(FB)不带开关
SSD2-12~25-FB

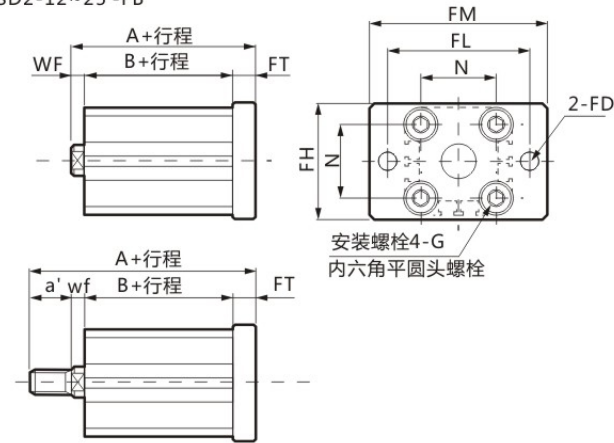

Φ(mm)	FD	FH	FL	FM	FT	N	G
Φ12	4.5	25	45	55	5.5	15.5	M4×12
Φ16	4.5	30	45	55	5.5	20	M4×12
Φ20	6.6	39	48	60	8	25.5	M6×16
Φ25	6.6	42	52	64	8	28	M6×16

Φ(mm)	WF	A	B	外螺纹时			
				a'	wf	A	B
Φ12	3.5	26	17	10.5	3.5	36.5	17
Φ16	3.5	26	17	12	3.5	38	17
Φ20	4.5	32	19.5	14	4.5	46	19.5
Φ25	5	35.5	22.5	17.5	5	53	22.5




SCA2
中型气缸

SSD2
紧凑型气缸





SSD2-L-32~100(带开关:TOH/V、T5H/V、T2H/V、T3H/V)

杆端外螺纹部分

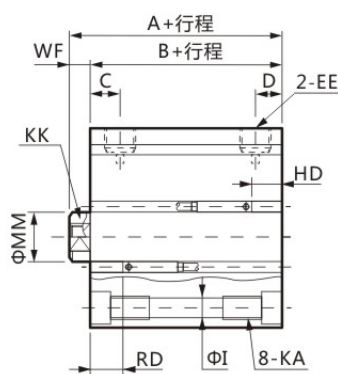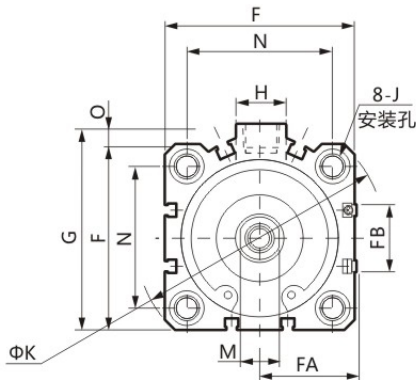

SSD2-32~100(不带开关)

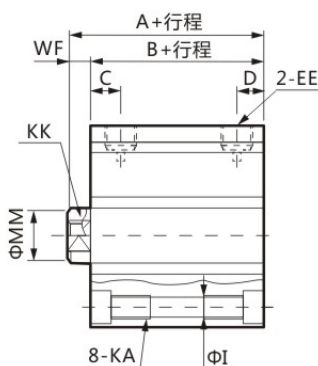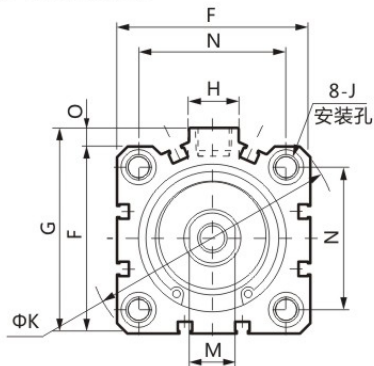

Φ(mm)	不带开关		带开关及通用尺寸													
	A	B	A	B	C	D	EE	F	FA	FB	G	H	I	J	K	KA
32	30(40)	23(33)	40	33	8(10)	8(5.5)	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	M9镗孔深度5.5	60	M6深度11
40	36.5(46.5)	29.5(39.5)	46.5	39.5	12(11.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	M9镗孔深度5.5	69	M6深度11
50	38.5(48.5)	3.5(40.5)	48.5	40.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	M11镗孔深度6.5	86	M8深度13
63	44(54)	36(46)	54	46	13	11	Rc1/4	77	39(42.5)	28.5	84	23	8.7	M14镗孔深度9	103	M10深度25
80	53.5(63.5)	43.5(53.5)	63.5	53.5	16	13	Rc3/8	98	49.5(53)	28.5	104	31	10.5	M17.5镗孔深度11	132	M12深度28
100	65(75)	53(63)	75	63	23	15	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	M17.5镗孔深度11	156	M12深度28

Φ(mm)	带开关及通用尺寸						有触点T0H·TOV、T5H·T5V		无触点T2H·T2V、T3H·T3V		无触点T2WH·T2WV、T3WH·T3WV	
	KK	M	MM	N	O	WF	HD	RD	HD	RD	HD	RD
32	M8深度13	14	16	34	4.5	7	4	9.5	14	9.5	6	11.5
40	M8深度13	14	16	40	5	7	7	12	7	12	8.5	13.5
50	M10深度15	17	20	50	7	8	7.5	12.5	7.5	12.5	9	14
63	M10深度15	17	20	60	7	8	12.5	13	12.5	13	14	14.5
80	M16深度21	22	25	77	6	10	17.5	15.5	17.5	15.5	19	17
100	M20深度27	27	30	94	6.5	12	23	19.5	23	19.5	24.5	21

※ () 内的尺寸为行程超过50时的值。

杆端外螺纹部分

Φ(mm)	a'	c'	H	kk'	M	MM	T	wf
32	23.5	20.5	22	M14×1.5	14	16	8	5
40	23.5	20.5	22	M14×1.5	14	16	8	5
50	28.5	26	27	M18×1.5	17	20	11	5
63	28.5	26	27	M18×1.5	17	20	11	5
80	35.5	32.5	32	M22×1.5	22	25	13	8
100	35.5	32.5	41	M26×1.5	27	30	16	8




轴向脚座(LB)

SSD2-(L)~32~100-LB

SCA2
中型气缸

SSD2
紧凑型气缸

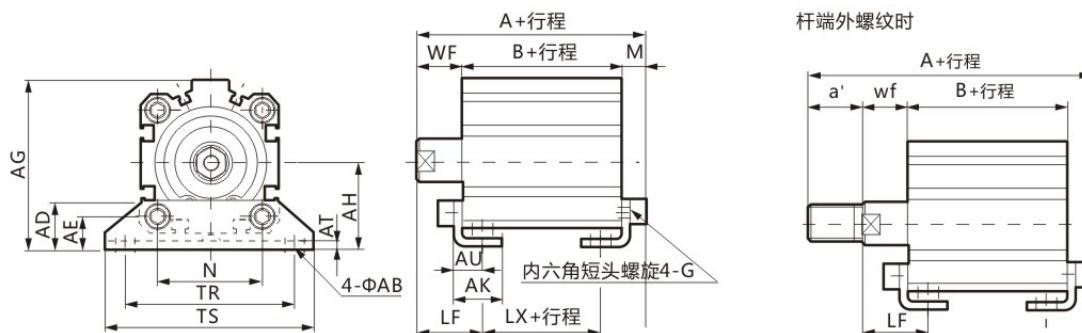

Φ(mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	不带开关			带开关		
																A	B	LX	A	B	LX
32	7	18.5	13	57	30	17	3.2	11.2	M6×16	34	57	71	7.2	17	25	47.2(57.2)	23(33)	7(17)	57.2	33	17
40	7	18	13	64	33	18.2	3.2	11.2	M6×16	40	64	78	7.2	17	25	53.7(63.7)	29.5(39.5)	13.5(23.5)	63.7	39.5	23.5
50	9	22	14	78	39	22.7	3.2	14.7	M8×20	50	79	95	8.2	18	29.5	56.7(66.7)	30.5(40.5)	7.5(17.5)	66.7	40.5	17.5
63	11	26	16	91.5	46	25.2	3.2	16.2	M10×25	60	95	113	9.2	18	31	63.2(73.2)	36(46)	10(20)	73.2	46	20
80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12×40	77	118	140	11.5	20	35	75(85)	43.5(53.5)	13.5(23.5)	85	53.5	23.5
100	13	35	24	136	71	35.5	6	23	M12×40	94	137	162	13	22	39	88(98)	53(63)	19(29)	98	63	29

外螺纹部分


Φ(mm)	a'	wf	LF	不带开关			带开关		
				A	B	LX	A	B	LX
32	23.5	15	23	68.7(78.7)	23(33)	7(17)	78.7	33	17
40	23.5	15	23	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5
50	28.5	15	26.5	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5
63	28.5	15	28	88.7(98.7)	36(46)	10(20)	98.7	46	20
80	35.5	18	33	108.5(118.5)	43.5(53.5)	13.5(23.5)	118.5	53.5	23.5
100	35.5	18	35	119.5(129.5)	53(63)	19(29)	129.5	63	29

※ () 内的尺寸为行程超过50时的值。

双耳环(CB)

SSD2-(L)-32~100-CB

杆端外螺纹时

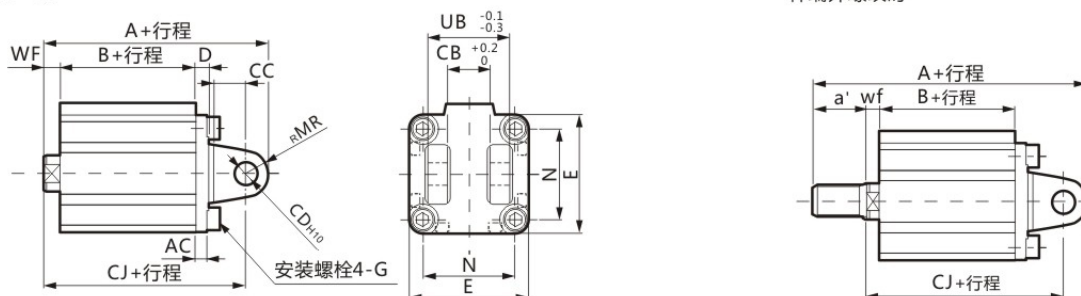

Φ(mm)	AB	CB	CC	CD	D	E	G	MR	N	UB	WF	不带开关			带开关		
												A	B	CJ	A	B	CJ
32	4.5	18.5	13	57	30	17	M6×16	34	10	71	7	60(70)	23(33)	50	70	33	17
40	5	18	13	64	33	18.2	M6×16	40	10	78	7	68.5(63.7)	29.5(39.5)	58.5	78.5	39.5	23.5
50	6	22	14	78	39	22.7	M8×20	50	14	95	8	80.5(66.7)	30.5(40.5)	66.5	90.5	40.5	17.5
63	7	26	16	91.5	46	25.2	M10×25	60	14	113	8	88(98)	36(46)	74	98	46	20
80	9	31.5	20.5	114	59	30.5	M12×40	77	18	140	10	109.5(119.5)	43.5(53.5)	91.5	119.5	53.5	23.5
100	12	35	24	136	71	35.5	M12×40	94	22	162	12	132(142)	53(63)	110	142	63	29



双耳环(CB)

SSD2-(L)-32~100-CB


外螺纹部分

Φ(mm)	a'	wf	不带开关			带开关		
			A	B	LX	A	B	LX
32	23.5	15	68.7(78.7)	23(33)	7(17)	78.7	33	17
40	23.5	15	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5
50	28.5	15	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5
63	28.5	15	88.7(98.7)	36(46)	10(20)	98.7	46	20
80	35.5	18	108.5(118.5)	43.5(53.5)	13.5(23.5)	118.5	53.5	23.5
100	35.5	18	119.5(129.5)	53(63)	19(29)	129.5	63	29



※ () 内的尺寸为行程超过50时的值。

前端法兰(FA)

SSD2-(L)-32~100-FA

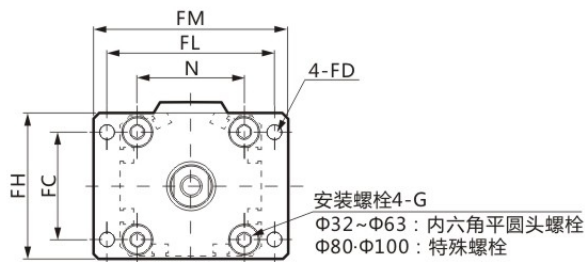

杆端外螺纹时




通用尺寸									内螺纹部分						外螺纹部分					
Φ(mm)	FC	FD	FH	FL	FM	FT	N	G	WF	不带开关		带开关		a'	wf	不带开关		带开关		
										A	B	A	B			A	B	A	B	
32	34	5.5	48	56	65	8	34	M6×16	17	40(50)	23(33)	50	33	23.5	15	61.5(71.5)	23(33)	71.5	33	
40	40	5.5	54	62	72	8	40	M6×16	17	46.5(56.5)	29.5(39.5)	56.5	39.5	23.5	15	68(78)	29.5(39.5)	78	39.5	
50	50	6.6	67	76	89	9	50	M8×20	18	48.5(58.5)	30.5(40.5)	58.5	40.5	28.5	15	74(84)	30.5(40.5)	84	40.5	
63	60	9	80	92	108	9	60	M10×25	18	54(64)	36(46)	64	46	28.5	15	79.5(89.5)	36(46)	89.5	46	
80	77	11	99	116	134	11	77	M12×40	20	63.5(73.5)	43.5(53.5)	73.5	53.5	35.5	18	97(107)	43.5(53.5)	107	53.5	
100	94	11	117	136	154	11	94	M12×40	22	75(85)	53(63)	85	63	35.5	18	106.5(116.5)	53(63)	116.5	63	



※ () 内的尺寸为行程超过50时的值。

后端法兰(FB)

SSD2-(L)-32~100-FB

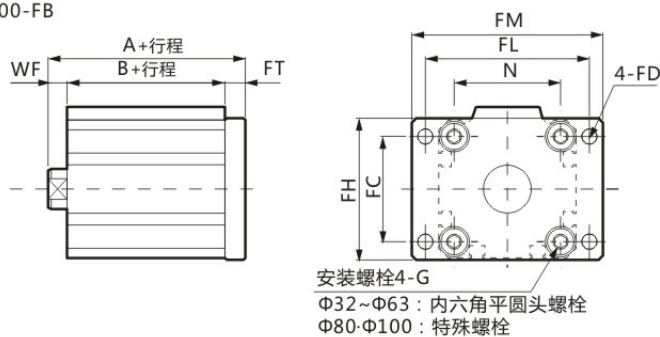

杆端外螺纹时



通用尺寸									内螺纹部分						外螺纹部分					
Φ(mm)	FC	FD	FH	FL	FM	FT	N	G	WF	不带开关		带开关		a'	wf	不带开关		带开关		
										A	B	A	B			A	B	A	B	
32	34	5.5	48	56	65	8	34	M6×16	7	38(48)	23(33)	48	33	23.5	5	59.5(69.5)	23(33)	69.5	33	
40	40	5.5	54	62	72	8	40	M6×16	7	44.5(54.5)	29.5(39.5)	54.5	39.5	23.5	5	66(76)	29.5(39.5)	76	39.5	
50	50	6.6	67	76	89	9	50	M8×20	8	47.5(57.5)	30.5(40.5)	57.5	40.5	28.5	5	73(83)	30.5(40.5)	83	40.5	
63	60	9	80	92	108	9	60	M10×25	8	53(63)	36(46)	63	46	28.5	5	78.5(88.5)	36(46)	88.5	46	
80	77	11	99	116	134	11	77	M12×40	10	64.5(74.5)	43.5(53.5)	74.5	53.5	35.5	8	98(108)	43.5(53.5)	107	53.5	
100	94	11	117	136	154	11	94	M12×40	12	76(86)	53(63)	86	63	35.5	8	107.5(117.5)	53(63)	117.5	63	

※ () 内的尺寸为行程超过50时的值。